


WORM GEAR

S22-380-3300-VAK

VACUUM & ULTRA-HIGH VACUUM

NO BACKLASH • PRECISE • ADAPTABLE

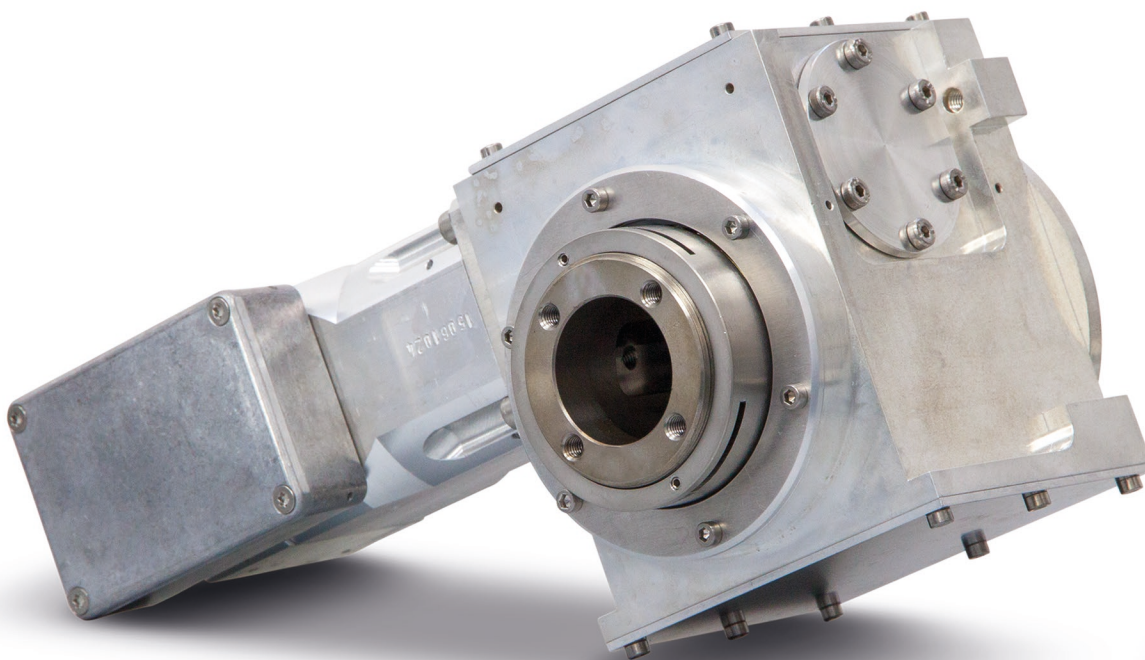

PROCESS
AUTOMATION

WORM GEAR S22-380-3300-VAK

with powerful servo motor
- without water cooling -

VACUUM RANGE	5×10^{-6} mBar
RATIO	22
MAX. INPUT SPEED	3300 rpm
MAX. OUTPUT SPEED	150 rpm
NOMINAL TORQUE	380 mNm
NOMINAL CURRENT	840 mA
short-term OVERLOAD	300 %



MECHANICAL PARAMETERS

customer-specifically adaptable
- individual system solutions -

HOLLOW SHAFT (in-/outside)	31.6/50 mm
DIMENSIONS (mm)	252/120/133.5
WEIGHT (incl. motor/cabel)	3.98 kg
ENCODER	resolver
WATER COOLING connection	n.a.
BODY MATERIAL	aluminum